


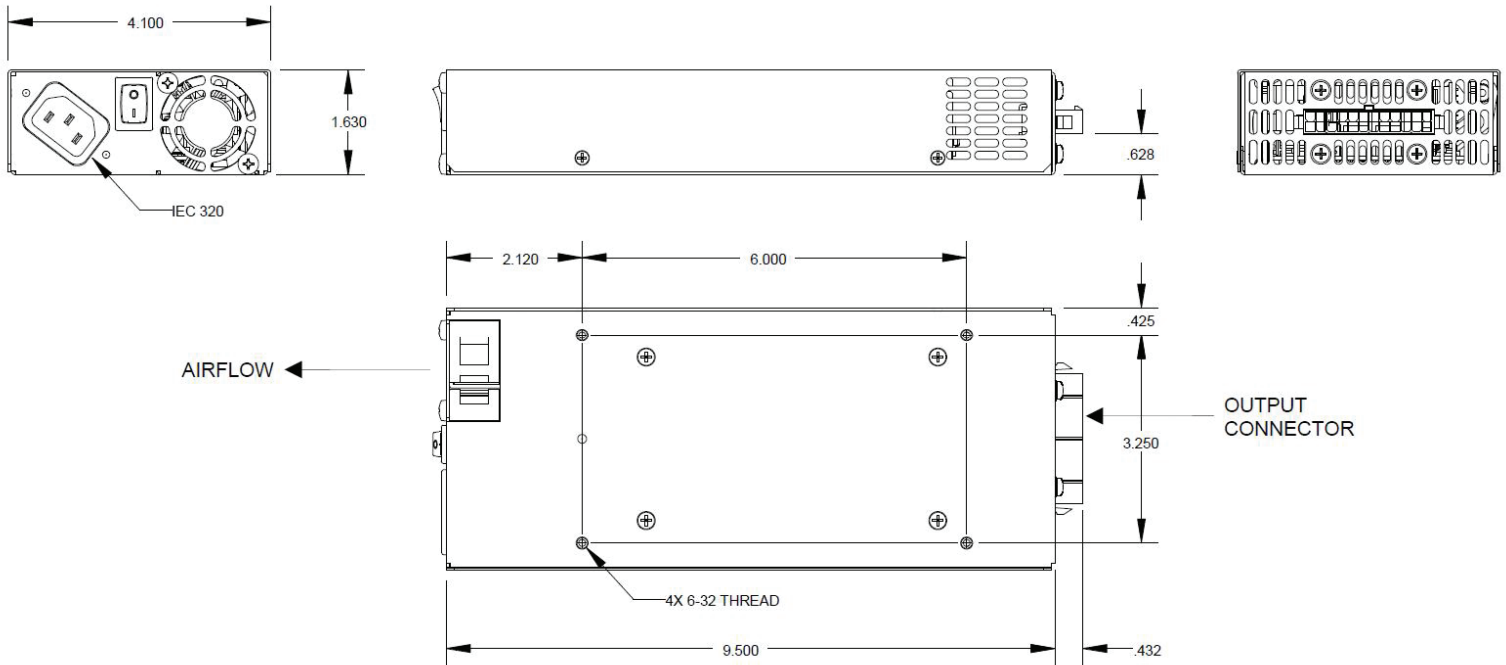
N2Power XL275 AC-DC Enclosed High Efficiency Power Supplies

ENCLOSURE OUTPUT CONNECTOR SPECIFICATIONS								
	PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL
	1	PG	7	+V1	13	V1 ISHARE	19	V1 RTN
	2	V1 TRIM	8	+V1	14	V2 / V3 RTN	20	V1 RTN
	3	+V2 (12V)	9	+V1	15	+V3 (+5Vsb)	21	V1 RTN
	4	-12V FAN	10	+V1	16	RE	22	V1 RTN
	5	+12V FAN	11	+V1	17	FAN TACK	23	V1 RTN
	6	+V1 SEN	12	+V1	18	-V1 SEN	24	V1 RTN

Connector is Molex P/N 0039012246 — Mating connector is Molex P/N 0039012240

Model	XL275-12 CS	XL275-24 CS	XL275-48 CS	XL275-54 CS	XL275-56 CS
+V1	12V	24V	48V	54V	56V
Part Number	400100-06-1	400100-07-9	400100-08-7	400100-09-5	400100-10-3

See the XL275 Engineering Specification for complete information



Every effort has been made to keep the information contained in this document current and accurate as of the date of publication or revision. However, no guarantee is given or implied that the document is error-free or that it is accurate with regard to any specification. N2Power reserves the right to change specifications without notice.

Contact us regarding custom and modified standard supplies for unique applications. For complete specifications on all models, please visit our website at N2Power.com

All information and specifications are based on our knowledge of the products at the time of printing. N2Power reserves the right to change specifications without notice.

© Copyright 2020 | Qualstar Corporation | All rights reserved



Call 805.583.7744

N2Power.com

Rev051520